

**2023**  
ANNUAL NOISE  
REPORT



**JACKSON HOLE AIRPORT BOARD**

Jackson Hole Airport  
1250 East Airport Road  
Jackson, Wyoming 83001

PREPARED BY:



BRIDGENET INTERNATIONAL, A TETRA TECH COMPANY

# **2023 Annual Noise Report**

Prepared:  
April 2024

Prepared For:

## **Jackson Hole Airport Board**

Jackson Hole Airport  
1250 East Airport Road  
Jackson, Wyoming 83001

*Prepared By:*

*BridgeNet International, A Tetra Tech Company  
20201 SW Birch Street Suite 150  
Newport Beach, CA 92660*

## Table of Contents

|  |           |
|--|-----------|
| <b>Executive Summary .....</b>                       | <b>iv</b> |
| <b>1.0 Introduction</b>                              | 1-1       |
| <b>2.0 Background Information on Noise</b>           | 2-1       |
| 2.1 Background                                       | 2-1       |
| 2.2 Noise Metrics                                    | 2-1       |
| 2.3 Federal and Local Noise Assessment Guidelines    | 2-2       |
| 2.3.1 Access Plan                                    | 2-2       |
| 2.4 Methodology in Determining the Noise Environment | 2-5       |
| <b>3.0 Operational and Flight Data</b>               | 3-1       |
| 3.1 Aircraft Operations                              | 3-1       |
| 3.2 Enplaned Passengers                              | 3-1       |
| 3.3 Noise Measurement and Analysis Procedures        | 3-4       |
| Continuous Measurement of the Noise                  | 3-4       |
| 3.4 Aircraft Operational and Radar Track Data        | 3-4       |
| Correlation of Noise and Flight Data                 | 3-5       |
| Calculation of Aircraft Noise Metrics                | 3-5       |
| <b>4.0 Noise Measurement Results</b>                 | 4-1       |
| 4.1 Introduction                                     | 4-1       |
| 4.2 Continuous Noise Measurement Data                | 4-2       |
| 4.3 Ambient Noise Measurement Results                | 4-4       |
| 4.4 Aircraft Single-Event Noise Measurement Results  | 4-7       |
| 4.5 DNL Noise Measurement Results                    | 4-13      |
| <b>5.0 Annual Noise Contours</b>                     |           |
| 5.1 Introduction                                     | 5-1       |
| 5.2 Existing Aircraft Operations                     | 5-1       |
| Fleet Mix  | 5-3       |
| Time of Day  | 5-3       |
| Runway Use   | 5-3       |
| Flight Path Utilization                              | 5-5       |
| 5.3 Noise Modeling Results                           | 5-6       |
| <b>6.0 Summary</b>                                   | 6-1       |
| 6.1 Overall Summary                                  |           |

## List of Tables

|  |      |
|--|------|
| Table 1-1 Noise Measurement Sites                              | 1-2  |
| Table 3-1 Annual Operations and Enplaned Passengers, 2001–2023 | 3-2  |
| Table 4-1 Ambient Noise Measurement Results                    | 4-5  |
| Table 4-2 Annual Aircraft DNL Results                          | 4-13 |
| Table 5-1 Summary of Operations                                | 5-2  |

---

## List of Figures

|            |   |      |
|------------|---|------|
| Figure 1-1 | Noise Measurement Location Map  | 1-3  |
| Figure 2-2 | Critical Area and Noise Sensitive Area Boundary                           | 2-4  |
| Figure 3-1 | Month-to-Month Operations for 2023  | 3-3  |
| Figure 4-1 | Sample Time History Noise Plot of Aircraft and Ambient Noise, Golf Course | 4-3  |
| Figure 4-2 | Site-Specific Ambient Noise Measurement Results, Oatgrass                 | 4-6  |
| Figure 4-3 | Noise Event Summary and Histogram Report, Moose                           | 4-8  |
| Figure 4-4 | Noise Event Summary and Histogram Report, 4 Lazy F Ranch                  | 4-9  |
| Figure 4-5 | Noise Event Summary and Histogram Report, Moulton Loop                    | 4-10 |
| Figure 4-6 | Noise Event Summary and Histogram Report, Golf Course                     | 4-11 |
| Figure 4-7 | Noise Event Summary and Histogram Report, Oatgrass                        | 4-12 |
| Figure 5-1 | Arrival and Departure Jet Tracks for Runway 19                            | 5-4  |
| Figure 5-2 | Arrival and Departure Jet Tracks for Runway 01                            | 5-5  |
| Figure 5-3 | 2023 Annual DNL Noise Contour   | 5-7  |

## **Executive Summary**

This report summarizes the measured and modeled noise environment at Jackson Hole Airport for calendar year 2023. The measurements and modeling effort is used to determine if the Airport is in compliance with the Airport Use Agreement (Agreement) between the U.S. Department of the Interior and the Jackson Hole Airport Board (Sponsor). The 2023 results of the measurement and modeling survey show that the Airport is in compliance with the requirements of the Airport Use Agreement.

Aircraft noise levels within the Park were measured and modeled below the levels specified within the Use Agreement. In addition to the Agreement specific to the Airport, the Federal Aviation Administration (FAA) has established a national guideline of 65 Day Night Average Sound Level (DNL) as the goal for compatibility with residential land use. The measured and modeled 65 DNL noise level does not extend into residential land uses and continues to be contained within Airport property.

## 1.0 Introduction

---

The purpose of this report is to present the results from the 2023 noise measurement and modeling survey at Jackson Hole Airport (Airport). Noise measurements are conducted year-round to determine the annual noise exposure levels from aircraft operations at the Airport. This year-end report summarizes the results from the calendar year annual measurements for 2023. The cumulative results are analyzed to determine if the Airport is in compliance with the Airport Use Agreement.

Historically from 1984 to 2003, noise monitoring was conducted for seasonal periods at three locations north and south of the Airport. Each site was monitored for one to three weeks during both the winter and summer peak season. The three sites that were monitored historically were Moulton Loop Road to the south of the Airport, Moose, and Barker Ranch to the north and west in Grand Teton National Park (GTNP or Park). In 2003, the Airport installed six noise monitors to continuously collect noise data. The existing sites at Moulton Loop, Moose, and Barker Ranch were upgraded with new noise monitors, and new sites were added at the Golf Course to the south and 4 Lazy F Ranch and Timber Ridge to the north in GTNP. These measurement locations are presented in **Table 1-1** and **Figure 1-1**. In the fall of 2021, a new site was installed in the Bar B Bar Ranch (Oatgrass) neighborhood and has continuously operated since; the results from 2023 for this monitor are also presented in this report. An eighth site was added in the summer of 2023 south of the Airport, with the full annual results for that site to be reported for calendar year 2024.

In 2008, a BI-6 radar data collection system was installed to allow the Airport's noise system to store flight track information, which provides correlation of flight tracks to recorded aircraft noise events. Prior to that, it was not possible to always correlate a noise event to the aircraft that caused the event; this was a manual process based on flight logs. Often, aircraft were not picked up on radar until they reached a thousand feet or higher above ground level. This system was upgraded again in 2014 that provided flight information associated with the radar tracks. Additionally, in 2020 the Federal Aviation Administration's (FAA) Automatic Dependent Surveillance-Broadcast (ADS-B) radar became fully operational, and the Airport installed a local ground station that now provides radar coverage at areas close to the Airport.

The historical annual reports provided information about the seasonal measurement results; with the installation of the system to record year-round, the reports still presented seasonal data to continue to show the peak period activities in summer and winter. The report format was updated in 2020 to show annual data for both cumulative DNL and single event Lmax. The report also switched to reporting calendar year results, eliminating the split-year reporting that was October to September.

**Table 1-1**  
Noise Measurement Site Locations


| Site | Name           | Location                                 | Area              | Latitude  | Longitude   |
|------|----------------|--|-------------------|-----------|-------------|
| 1    | Moulton Loop   | Zenith Drive and Spring Gulch Road       | South Residential | 43.592342 | -110.744542 |
| 2    | Golf Course    | Jackson Hole Golf & Tennis Club          | South Residential | 43.562232 | -110.753580 |
| 3    | Barker Ranch   | Circle H Ranch (Former Barker Residence) | GTNP              | 43.637980 | -110.758610 |
| 4    | Moose          | Moose along Snake River                  | GTNP              | 43.648249 | -110.716753 |
| 5    | 4 Lazy F Ranch | 4 Lazy F Ranch                           | GTNP              | 43.662913 | -110.708956 |
| 6    | Timber Island  | East of Timber Island                    | GTNP              | 43.714844 | -110.713525 |
| 7    | Oatgrass       | 445 E. Oatgrass (Bar B Bar Ranch)        | South Residential | 43.578046 | -110.754271 |
| 8    | Zenith         | 6200 E. Zenith Road – New Site           | South Residential | 43.570182 | -110.76358  |

Source: BridgeNet International, 2024

One purpose of the measurements is to determine if the Airport is in compliance with the Airport Use Agreement (Agreement) between the U.S. Department of the Interior and the Jackson Hole Airport Board (Sponsor). The 2023 results of the measurement and modeling survey show that the Airport is in compliance with the requirements of the Airport Use Agreement. Aircraft noise levels within the Park were measured and modeled below the levels specified within the Use Agreement. In addition to the Agreement specific to the Airport, the Federal Aviation Administration (FAA) has established a national guideline of 65 Day Night Average Sound Level (DNL) as the goal for compatibility with residential land use. The 65 DNL noise level does not extend into residential land uses and continues to be contained within Airport property.



**Figure 1-1**  
Noise Measurement Location Map

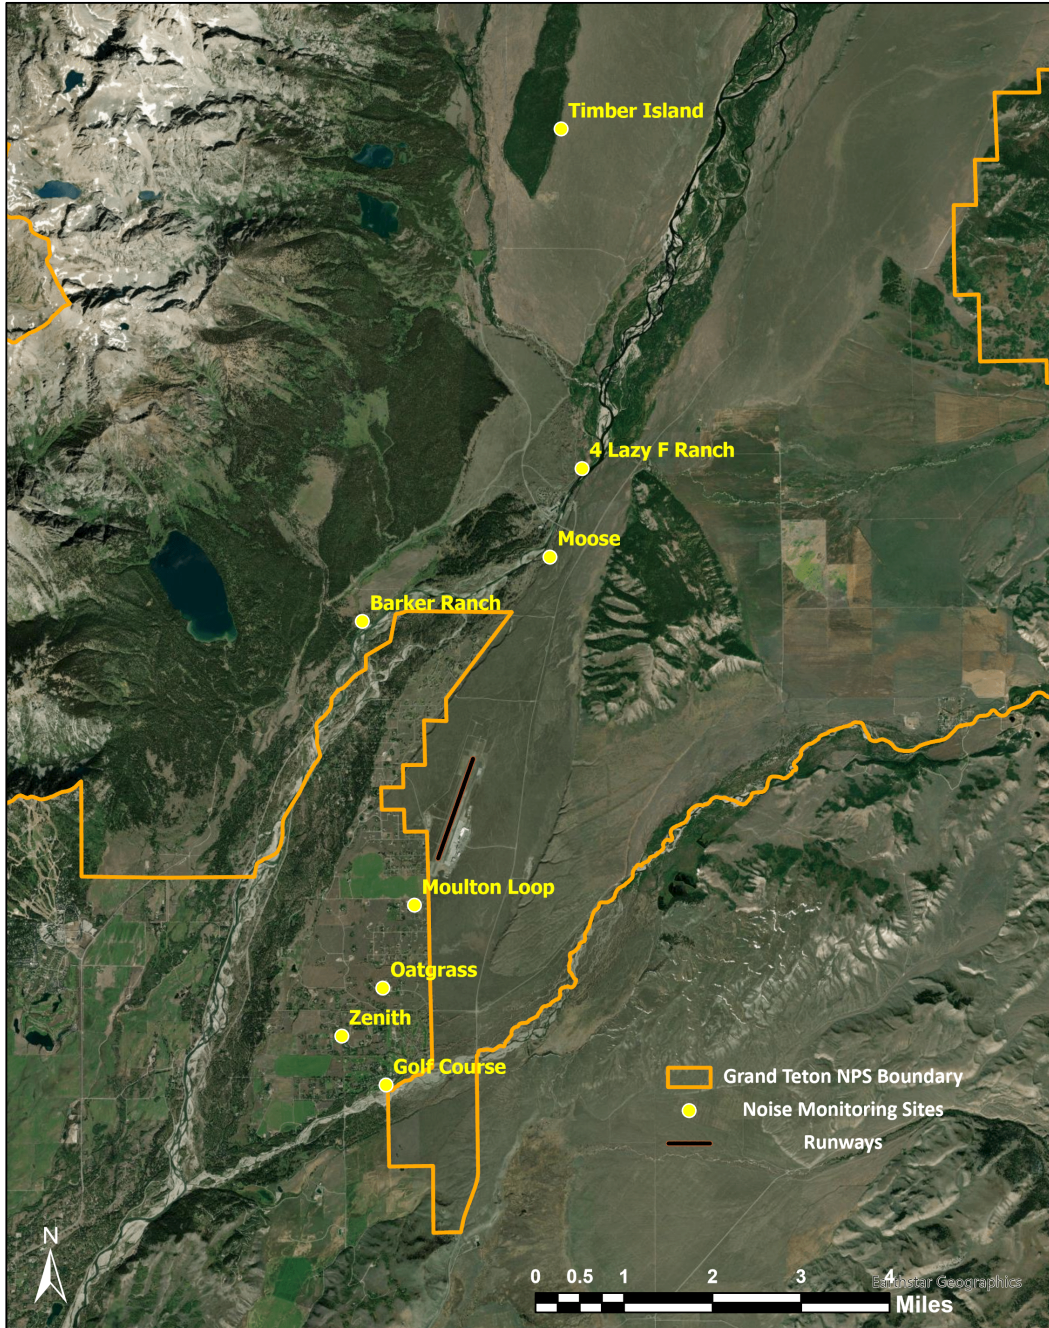

Source: BridgeNet International, 2023

## 2.0 Background and Information about Noise

---

### 2.1 Background

Jackson Hole Airport is the only commercial service airport in the country that is located entirely within a national park. Accordingly, it has had a long history of addressing noise. The Airport Board has also developed several special noise measures to minimize intrusions from aircraft noise. These measures and a brief history of their development are presented in this section.

### 2.2 Noise Metrics

The description, analysis, and reporting of community sound levels from aircraft are difficult given the complexity of human response to sound. This analysis utilized the two major noise metrics for analysis of aircraft noise impacts: Day Night Average Sound Level (DNL) and the Maximum A-Weighted Noise Level (Lmax). Both metrics are based on the A-weighted decibel (dBA), which most closely replicates how the human ear hears sound.

**Day Night Average Sound Level.** DNL, the primary metric for analysis, is a cumulative noise metric because it represents a measure of the total noise over a 24-hour period. Cumulative noise metrics are useful because these scales attempt to combine the loudness of each event, the duration of these events, the total number of events, and the time of day these events occur into a single number rating scale. The DNL also considers the loudness of the events and how often and when they occur. Aircraft events occurring between 10 p.m. and 7 a.m. are penalized 10 dBA to account for lower ambient noise levels at night. The FAA, the Environmental Protection Agency (EPA), and other government agencies use DNL in assessing noise and land use compatibility.

**Maximum Sound Level.** Lmax is a measure of single-event noise that describes the loudness of a single flyover regardless of the time of day or the number of such events. Lmax is the peak or loudest sound reached during an aircraft flyover. There are no noise and land use compatibility standards in terms of Lmax. In general, it is the metric that is more easily related to by the public because it is what the public hears on a per-event basis.

**Sound Exposure Level.** SEL is calculated by summing the dB level at each second during a noise event and compressing that noise into one second. It is the level the noise would be if it all occurred in one second and allows different noise events to be compared in a uniform manner. The SEL value is the integration of all the acoustic energy contained within an event and considers the maximum noise level and duration of the event.

### 2.3 Federal and Local Noise Assessment Guidelines

Noise/Land use guidelines have been developed by several agencies, including the FAA. As a means of implementing the Aviation Safety and Noise Abatement Act, the FAA adopted regulations on airport noise compatibility planning programs. The guidelines specify a maximum amount of noise exposure (in terms of the cumulative DNL noise metric) that will be considered acceptable to or compatible with people in both living and working areas. Residential land use is deemed compatible for noise exposures up to 65 DNL.

#### 2.3.1 Access Plan

As part of the Agreement with the U.S. Department of the Interior, Jackson Hole Airport is required to comply with certain noise limits within GTNP. The primary restrictions are that the Airport cannot exceed specific DNL cumulative noise levels at critical locations within the Park boundary. The annual cumulative level from aircraft noise at the Moose measurement location, in the southeastern corner of the noise sensitive areas of the Park, cannot exceed 55 DNL. In addition, there is a Critical Area Boundary within the Park where annual aircraft noise levels cannot exceed 45 DNL. These areas are shown in **Figure 2-1**.

In 1983, the Airport Board and the U.S. Department of the Interior entered into a new agreement for the continued operation of the Airport in GTNP. To facilitate meeting the cumulative noise limits of the Agreement, the Airport Board developed an Access Plan. This Access Plan places a limit on the number of commercial jet aircraft operations necessary to meet the cumulative standards associated with the “base class” aircraft at the time. Operations of the Boeing 737-200 D-17 base class aircraft were limited to 6.85 Average Daily Departures (ADD). Increases in the number of operations may only be accomplished by substituting quieter, new generations of aircraft, which at that time were just entering into service.


The Agreement also included a single-event noise limit that restricted the operation of any aircraft that generated sound levels above 92 dBA, as defined by the approach dBA level from 14 CFR FAR Part 36 regulations (*Note: This numeric value is based on the effective perceived noise level (EPNdB), which is a different metric than the annual noise levels shown in this report. Therefore, this single-event noise limit and the annual average noise levels shall be analyzed separately.*) This essentially eliminated aircraft from operating at the Airport that generated higher noise levels than the Boeing 737-200 D-17 aircraft.

The following points summarize the noise abatement measures outlined in the Airport’s Noise Abatement Plan, which was a requirement of the Access Plan:

- Operations by commercial turbojet aircraft should be between the hours of 7:00 am – 9:30 pm. and general aviation aircraft adhere to this same voluntary curfew.
- A preferential runway program that requests that all aircraft depart to the south and arrive from the south when wind/weather conditions permit.

- Aircraft are encouraged to maintain a course east of Highway 26/89 north of Moose.
- Aircraft with a single event noise level higher than 92 dBA will not be allowed to operate at the airport.
- A request to not operate training, charter, or scenic flights over noise sensitive areas of the Park.
  
- A request that all aircraft departing to the south make a left turn, as weather conditions permit. This procedure is seldom utilized today because the majority of aircraft fly an instrument flight rules (IFR) procedure.
  
- A request that aircraft entering the area from the south but landing from the north perform a left downwind turn near Blacktail Butte, as weather conditions permit. Right downwind turns over the Park are discouraged.
  
- A comprehensive operational and noise monitoring program that documents the level of compliance with these noise abatement procedures.

**Figure 2-1**  
Critical Area and Noise Sensitive Area Boundary

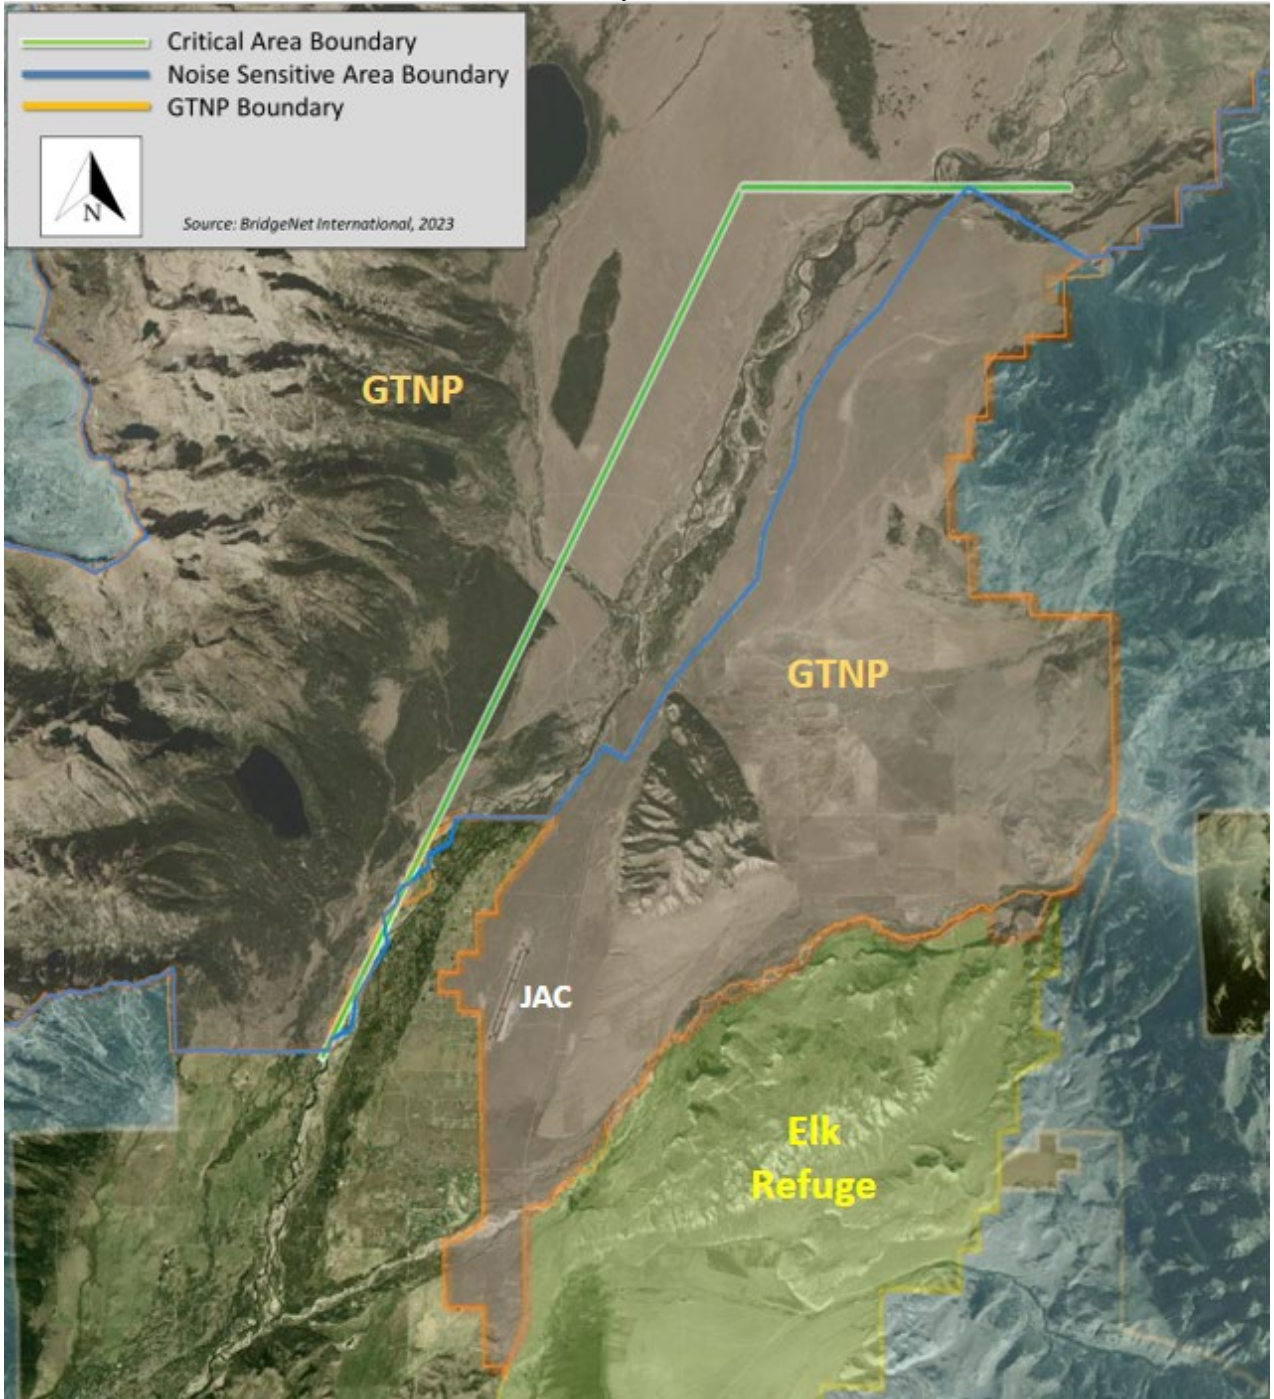

Source: BridgeNet International, 2023

### *2.4 Methodology in Determining the Noise Environment*

The noise environment at Jackson Hole Airport was determined through the employment of comprehensive noise measurements from the Airport's monitoring system and noise modeling effort. This system records ambient and aircraft noise sources. The noise measurement surveys determine DNL, Lmax levels from each aircraft flyover, SEL, and background or non-aircraft ambient noise environment.

The measurements are annualized by correlating measured noise events with flight radar. The results of the measurements, in conjunction with annual airport operational data, are incorporated into the FAA's Aviation Environmental Design Tool (AEDT) software program through which annual average noise levels at any location around the Airport can be predicted. The noise environment is commonly depicted in terms of lines of equal noise levels, or noise contours. Compliance with the Use Agreement requirements are determined from the noise modeling results.

Noise measurements are conducted at seven locations around the Airport, shown in **Figure 1-1**. The Moulton Loop measurement site is indicative of the residential area directly south of the Airport, which is directly under the extended runway centerline, approximately 2,200 feet south of the runway's end and is one of the areas exposed to the highest noise levels just north of where the residential development starts. In 2003, the Moulton Loop site was moved approximately 200 feet closer to the runway's end than the old site. This results in slightly higher noise-level readings. The Oatgrass site is centrally located in the residential area south of the Airport within the Bar B Bar subdivision.

The Moose measurement site is in GTNP, south of Teton Park Road and directly under the extended runway centerline. The Agreement requires that the aircraft noise levels at this location not exceed 55 DNL. The Barker Ranch measurement site is also within GTNP, along Moose-Wilson Road northwest of the Airport. This site is on the restriction line that requires that aircraft noise levels not exceed 45 DNL.

## 3.0 Operational and Flight Data

---

### 3.1 Aircraft Operations

The 2023 aircraft operations were derived directly from the Airport summary of daily logs, the Airport's noise monitoring system radar data, and FAA Operations Network (OPSNET) data. The breakdown in the category of operations is based on the FAA's Traffic Flow Management System Counts (TFMSC) data. The 2023 annual operations along with data from 2001 to the most recent period are presented in **Table 3-1**. The total number of operations during the 12-month period was 31,329 – an operation is one departure or one arrival. The total operations showed an increase in operations over 2022 but still below the 2021 peak and it should be noted the Airport was closed for 78 days in 2022 for runway construction. This included 8,327 commercial jet operations, 3,519 regional jet operations, 16,545 corporate jet operations, and 2,938 operations classified as other.

The operations have seasonal differences with more activity during the summer and winter months. **Figure 3-1** presents the monthly activity broken down by total operations, commercial/regional, and corporate jet activity. As shown in this figure, activity levels are highest in the summer and winter months; for 2023, August had the highest number of operations. The data from **Figure 3-1** is derived from the Airport's noise monitoring system data and will not exactly match the FAA counts.

### 3.2 Enplaned Passengers

The total number of enplaned passengers is also presented in **Table 3-1**. For 2023, there were 500,742 enplaned passengers.

**Table 3-1**  
Annual Operations and Enplaned Passengers, 2001–2023


| YEAR  | AIRCRAFT ANNUAL OPERATIONS |              |               |        |        | ENPLANED PASSENGERS |
|-------|----------------------------|--------------|---------------|--------|--------|---------------------|
|       | COMMERCIAL JET             | REGIONAL JET | CORPORATE JET | OTHER  | TOTAL  |                     |
| 2023  | 8,327                      | 3,519        | 16,545        | 2,938  | 31,329 | 500,742             |
| 2022* | 5,888                      | 3,574        | 15,164        | 4,222  | 28,848 | 405,693             |
| 2021  | 9,310                      | 3,592        | 18,730        | 8,996  | 40,628 | 508,838             |
| 2020  | 5,854                      | 1,934        | 14,628        | 6,706  | 29,122 | 284,433             |
| 2019  | 7,096                      | 2,480        | 11,346        | 6,403  | 27,325 | 454,629             |
| 2018  | 6,018                      | 2,670        | 11,972        | 6,303  | 26,963 | 391,353             |
| 2017  | 5,632                      | 2,322        | 11,794        | 9,241  | 28,989 | 353,776             |
| 2016  | 5,212                      | 3,008        | 10,422        | 11,737 | 30,379 | 346,127             |
| 2015  | 4,582                      | 2,798        | 10,104        | 10,656 | 28,140 | 316,674             |
| 2014  | 4,062                      | 3,100        | 9,372         | 9,583  | 26,117 | 305,186             |
| 2013  | 3,592                      | 2,530        | 8,822         | 8,549  | 23,493 | 292,176             |
| 2012  | 3,586                      | 2,698        | 8,440         | 11,354 | 26,078 | 272,888             |
| 2011  | 3,868                      | 2,840        | 8,484         | 10,584 | 25,776 | 281,808             |
| 2010  | 4,112                      | 2,722        | 7,904         | 10,869 | 25,607 | 286,660             |
| 2009  | 3,738                      | 2,736        | 7,702         | 14,826 | 29,002 | 281,674             |
| 2008  | 4,110                      | 2,648        | 9,252         | 14,209 | 30,219 | 304,393             |
| 2007  | 3,514                      | 2,358        | 10,862        | 13,871 | 30,605 | 275,569             |
| 2006  | 3,676                      | 2,506        | 10,204        | 15,848 | 32,234 | 271,416             |
| 2005  | 3,774                      | 592          | 10,510        | 18,196 | 33,072 | 241,925             |
| 2004  | 3,106                      | 50           | 9,744         | 18,893 | 31,793 | 208,000             |
| 2003  | 3,646                      | 334          | 8,844         | 20,769 | 33,593 | 212,731             |
| 2002  | 2,304                      | 12           | 8,240         | 25,422 | 35,978 | 179,510             |
| 2001  | 1,666                      | 584          | 7,374         | 30,974 | 40,598 | 169,249             |

Source: FAA OPSNET and TFMS data

Note\*: The Airport was closed between April 11, 2022, and June 27, 2022 for runway construction.



**Figure 3-1**  
 Month-to-Month Operations for 2023

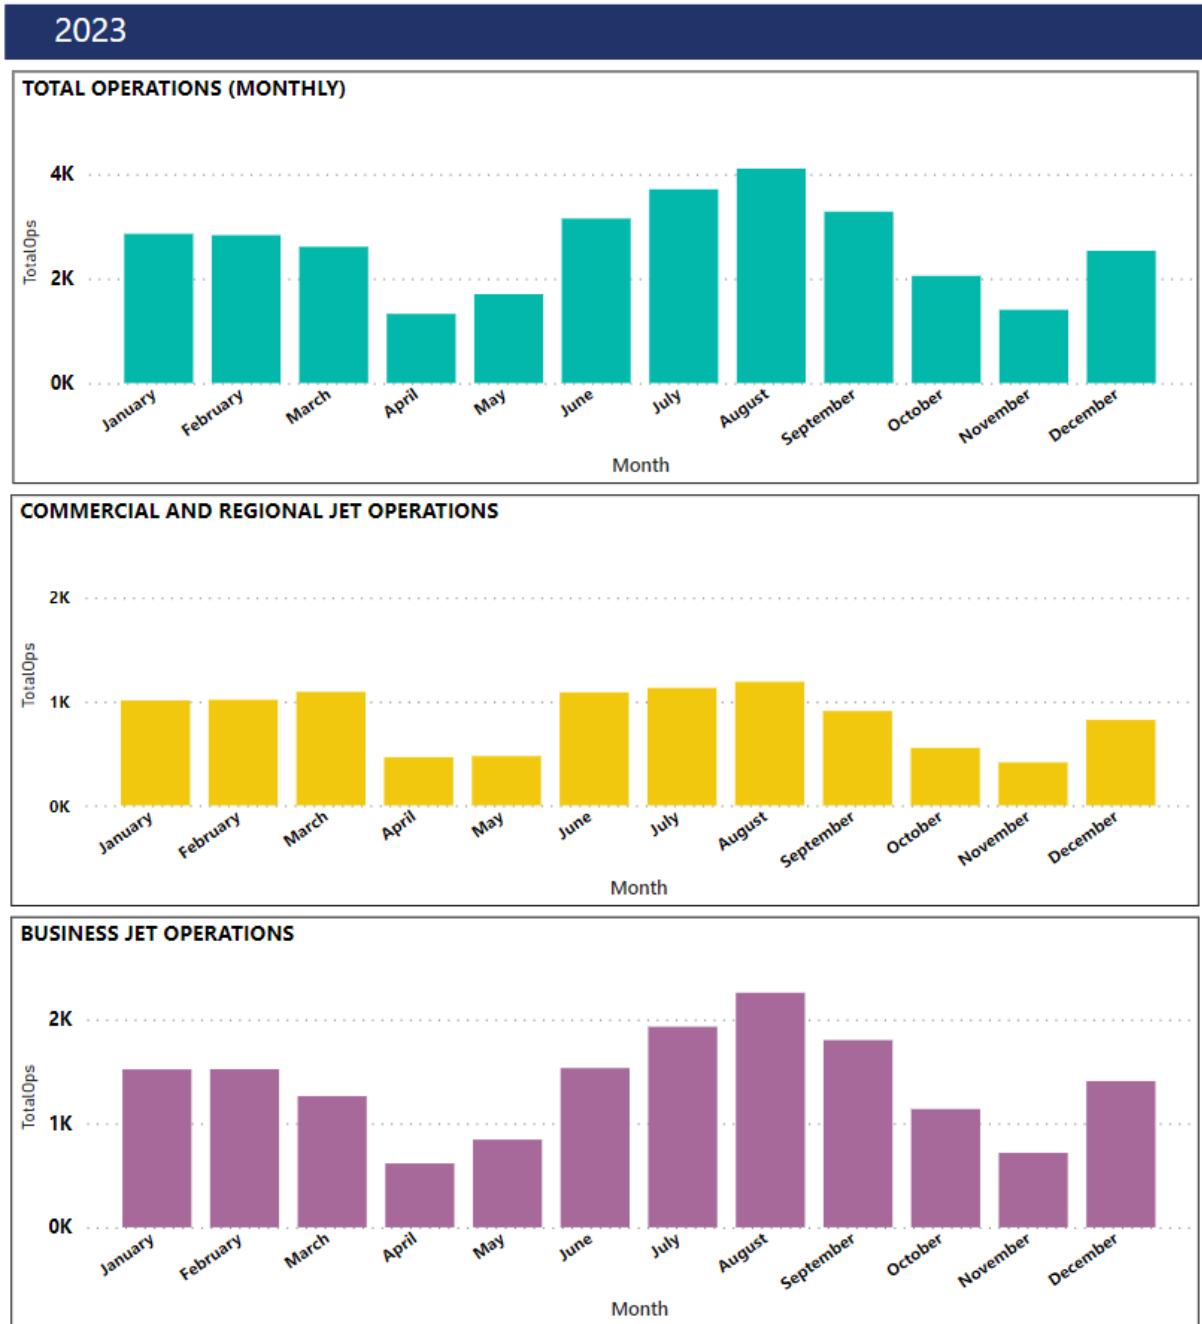

Source: Jackson Hole Airport Noise Monitoring System Data, 2023

### *3.3 Noise Measurement and Analysis Procedures*

The following section outlines the methodology used to measure and quantify noise levels from aircraft operations and ambient noise-level conditions. Measurement methodology and analysis techniques used in the study are also included, which comply with the Use Agreement. As noise measurement and modeling technology has advanced since the 1980s when the Use Agreement was put in place, modern software and hardware are used to confirm compliance, such as replacing INM with the current version FAA Aviation Environmental Design Tool (AEDT).

#### Continuous Measurement of the Noise

The methodology used in this study uses the continuously recorded one-second equivalent sound level (LEQ) noise levels at each of the seven measurement locations. From this data, different noise metrics can be calculated. This includes the aircraft Lmax, DNL, and the ambient levels. The noise monitors collect continuous 1-second data; therefore, it is possible to post-process the data and calculate different metrics of interest. The process of calculating noise events from this data uses a floating threshold methodology, which allows for the measurement and identification of lower noise-level aircraft events. The parameters are adjustable and can be modified to recalculate noise events from raw data any time in the future.

### *3.4 Aircraft Operational and Radar Track Data*

Historically, radar data was not available at the Airport. In fall of 2008, the FAA installed a BI-6 radar system at the Airport. With the installation of radar, the noise monitoring system was also upgraded to obtain this data. The upgrade consisted of numerous components, including access to the BI-6 radar data, weather data, and the addition of new features to the remote noise monitoring stations. The BI-6 radar data connection allows for the noise monitoring system to correlate an aircraft noise event to the aircraft causing the event. At the same time, the noise monitoring sites were also upgraded to measure detectability. Detectability approximates the U.S. Department of Transportation's Volpe Center standards for measuring aircraft noise in a park setting. The audible contribution of aircraft and other noise sources to the Park's natural quiet can be approximated using the detectability metric. The upgrade allows the noise monitoring system to measure aircraft noise levels more accurately at the noise measurement points and to also quantify the aircraft audibility levels at these locations.

The BI-6 radar was the primary source for aircraft operational information; however, the data was initially just radar tracks without aircraft identification. In 2014, a national radar feed subscription became available that provides both radar track and flight information data. The Airport maintains a live feed of all the Instrument Flight Rules (IFR) aircraft activity in the United States directly from FAA center data. This provides data on all domestic civilian IFR aircraft; the data stream includes aircraft type, position, and altitude by time. Visual Flight Rules (VFR) aircraft are often tracked, but typically there is no identifying information, such as a unique N-number. The radar coverage in the valley does not reach the Airport surface, so

operations near the Airport and low-altitude flights were not typically tracked by this data source.

In 2020, the FAA's Automatic Dependent Surveillance – Broadcast (ADS-B) radar system became operational nationwide and greatly increased the coverage and accuracy of the radar data. The Airport also installed an ADS-B ground station at the Airport that allowed for better coverage of operations at low altitudes. The ADS-B radar data includes flight information for every ADS-B equipped aircraft, as well as position information along the flight track. Each flight is also assigned a unique identification number so all the data for any flight can be collected and stored. The flight information includes data such as aircraft type, airline code, departing and arriving airport codes, unique aircraft N-number, and flight ID number. The position information includes the *X* and *Y* coordinates, as well as the altitude of the aircraft at each point with greater accuracy than conventional radar information. The location information provides the information necessary to determine the direction of flow for runway usage.

ADS-B surveillance requires an aircraft to be equipped with an ADS-B transponder and that it is turned on. All commercial and large general aviation aircraft have this equipment, and it is turned on during flight. Smaller propeller aircraft are not required to have this equipment to operate in non-busy airspaces, but most aircraft are equipped. There will be some VFR aircraft that are not tracked by ADS-B due to the above reasons.

#### Correlation of Noise and Flight Data

The noise monitoring system was used to help correlate aircraft flight activity to the noise data. This software utilizes such methods as aircraft position information (the position of the aircraft at the time of the noise event to correlate the aircraft to the noise event), noise event sequencing, and noise event profiling to correlate noise data to the aircraft activity. Noise event profiling is used to identify characteristics of both the aircraft and non-aircraft noise events.

#### Calculation of Aircraft Noise Metrics

Once the collection and correlation of the noise and flight data is complete, the various noise metrics can be calculated. A computer process is used to calculate the single-event, cumulative, and ambient noise metrics of interest from the data collected at each of the noise monitoring sites. This includes the ambient background noise levels (dBA), the single-event noise levels (Lmax), and the cumulative noise levels (DNL).

## 4.0 Annual Noise Measurement Results

---

### 4.1 Introduction

The existing noise environment for the Airport was determined through a noise measurements and modeling. The results of the are summarized in the following paragraphs, presenting the overall findings from the measurements and modeling, including an explanation of the results, and is divided into the following subsections:

#### Noise Measurement Results

- Continuous noise measurement data
- Ambient noise measurement results by hour (dBA)
- Single-event noise measurement results (Lmax)
- Annual average measurement results (DNL)


The Airport's noise monitoring system utilizes Larson David 824s and ACOEM 01dB CUBE noise monitors at the measurement sites. The monitoring system is state of the art and complies with all specific International Standards (IEC) and measurement standards established by the American National Standards Institute (ANSI) for Type 1 instrumentation.

The data collected by the monitors includes the continuous measurement of 1-second average equivalent sound levels (LEQ). This type of measurement system allows for the measurement and identification of Lmax noise events at a lower threshold. This allows for a more accurate measurement of lower aircraft noise levels that are typical of the sites in the Park. Analysis of this data resulted in the single-event noise levels from each individual flyover, hourly data, and the daily DNL noise levels for the measurement period. The report presents data for the annual levels.

### 4.2 Continuous Noise Measurement Data

Noise levels are continuously recorded at each of the noise monitoring sites. In addition to recording the noise events from aircraft, monitors also record the ambient noise level of the community surrounding the site. A sample of this data is presented in **Figure 4-1**, which displays a 15-minute segment of continuous noise data that was measured at Site 2 – Golf Course. The measured A-weighted noise level value is shown on the vertical axis; and time of day, in minutes, is displayed on the horizontal axis. The difference between an aircraft event and the ambient noise can be easily distinguished in this plot, with each of the peaks generated by an aircraft overflight. For this example, the peak noise levels from the aircraft flyovers were in the mid-60s and low 70s dBA. The ambient levels between aircraft events were in the mid-30s dBA.

**Figure 4-1**  
Sample Time History Noise Plot of Aircraft and Ambient Noise - Golf Course

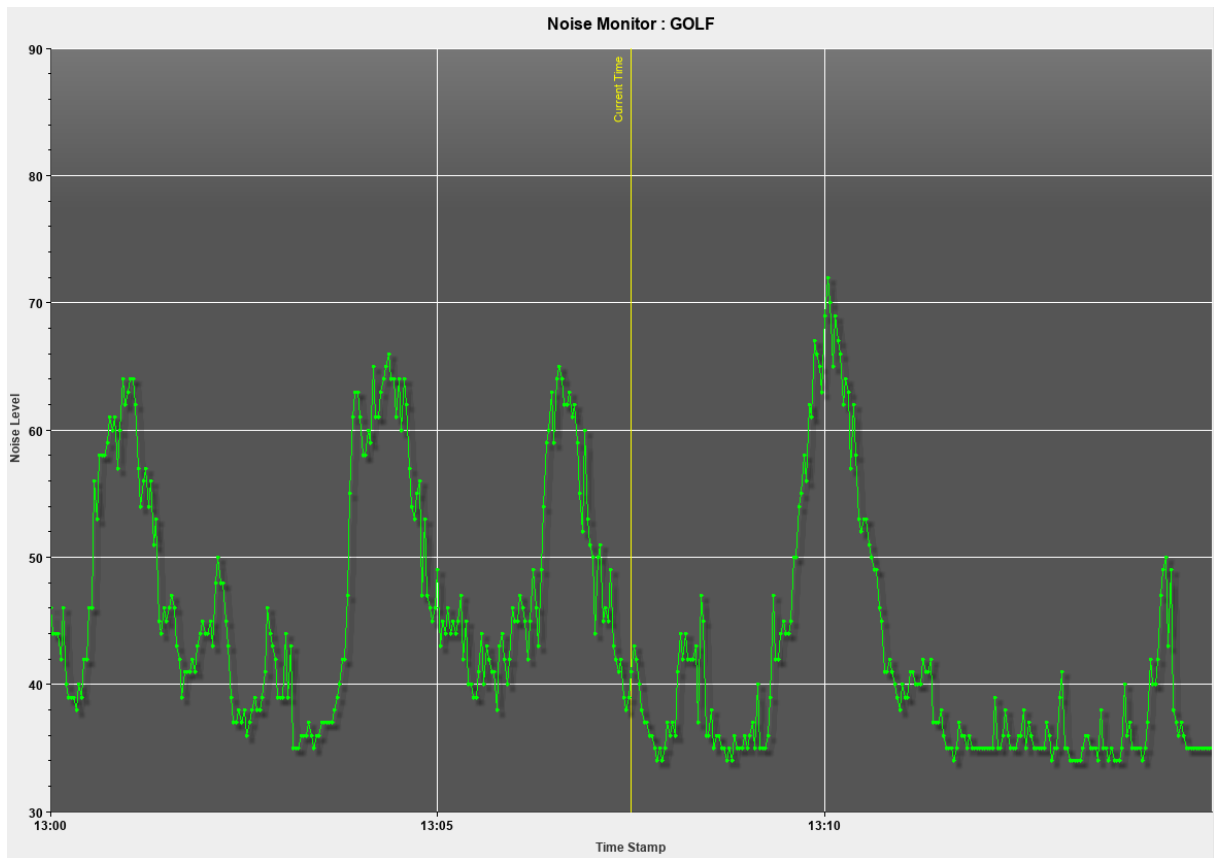

Source: Jackson Hole Airport Noise Monitoring System, 2023

### 4.3 Ambient Noise Measurement Results

Background, or ambient noise levels, (not including aircraft noise) are measured at each monitoring location, and these results are presented using Percent Noise Levels (Ln). Ln characterizes intermittent or fluctuating noise by showing the noise level that is exceeded during a significant percentage of time during the noise measurement period. Ln is most often used to characterize the statistical distribution of measured noise levels. For example, L90 is the noise level exceeded 90 percent of the time, L50 is the level exceeded 50 percent of the time, and L10 is the level exceeded 10 percent of the time. Typically, L90 represents the background noise level, L50 represents the median or ambient noise level, and L10 represents the most intrusive noise levels.

Other noise sources that are part of a background noise environment include roadway, wind in the trees, and community activities. This data aids in assessing how intrusive aircraft noise is on the ambient environment.

Results of the ambient noise measurement survey at each measurement site are displayed **Table 4-1**, which presents the annual statistical summary of the ambient measurements at each site using the Ln noise levels for L99, L90, L50, L10, and L1. L1 is presented for the loudest 1-second dBA value measured, while the L99 is the lowest 1-second dBA value measured. This table illustrates the range in noise levels that exist at each site. Aircraft noise events are included in this data and are typically the source of the peak or maximum noise levels.

**Table 4-1**  
Annual Ambient Noise Measurement Results (2023)

| Site | Name           | Statistical Noise Levels (dBA) |     |     |     |     |
|------|----------------|--------------------------------|-----|-----|-----|-----|
|      |                | L1                             | L10 | L50 | L90 | L99 |
| 1    | Moulton Loop   | 61                             | 49  | 40  | 35  | 33  |
| 2    | Golf Course    | 55                             | 46  | 40  | 38  | 37  |
| 3    | Barker Ranch   | 47                             | 41  | 37  | 34  | 33  |
| 4    | Moose          | 54                             | 43  | 38  | 36  | 35  |
| 5    | 4 Lazy F Ranch | 51                             | 38  | 34  | 33  | 31  |
| 6    | Timber Island  | 43                             | 35  | 28  | 24  | 23  |
| 8    | Oatgrass       | 53                             | 38  | 32  | 30  | 28  |


Source: BridgeNet International, 2023

Industry practices indicate that L90 is a good representation of the background noise level and L50 the ambient noise level. These represent the levels that are exceeded 90 percent of the time and 50 percent of the time, respectively. L90 is referred to as the residual noise when other sources of noise are not present and is the level above which noise events occur, such as an aircraft overflight or a vehicle pass-by. Aircraft noise would have very little, if any, contribution to this noise level because of the relatively short duration of these noise events. The L50 noise level is referred to as the median or ambient noise level. Half of the time, the noise is below this level, and half of the time it is above. Even during peak hours of aircraft activity, the L50 noise level would not be influenced by aircraft noise. This level is generally reflective of background sound levels when other sounds are not present.

The measurements show that background L90 noise levels ranged from a low of 20 dBA to a high in the mid-30s dBA. Most sites had an average L90 noise level right around the mid-30s dBA. The ambient L50 noise levels ranged from the high 20s dBA to 40s dBA. The majority of these sites are located in relatively quiet settings that are not exposed to other noise sources, such as highways or community activities. However, a number of the sites are near the Snake River or Gros Ventre River, which does influence the background and ambient noise levels.

Ambient noise levels vary by day, and time of day as summarized in the data from the Oatgrass site, which is presented in **Figure 4-2**. The figure shows each hour of ambient measurement data for a typical day (October 11, 2023) at that site. Day-to-day ambient noise levels are generally similar, with higher levels occurring during high wind conditions. Ambient noise levels vary by time of day, with quieter levels typically occurring during night and early-morning hours, and with higher levels occurring during daytime hours. Typical quiet ambient noise hours range from 5 to 10 dBA lower than average hours.

**Figure 4-2**  
 Site-Specific Ambient Noise Measurement Results - Oatgrass  
 October 11, 2023

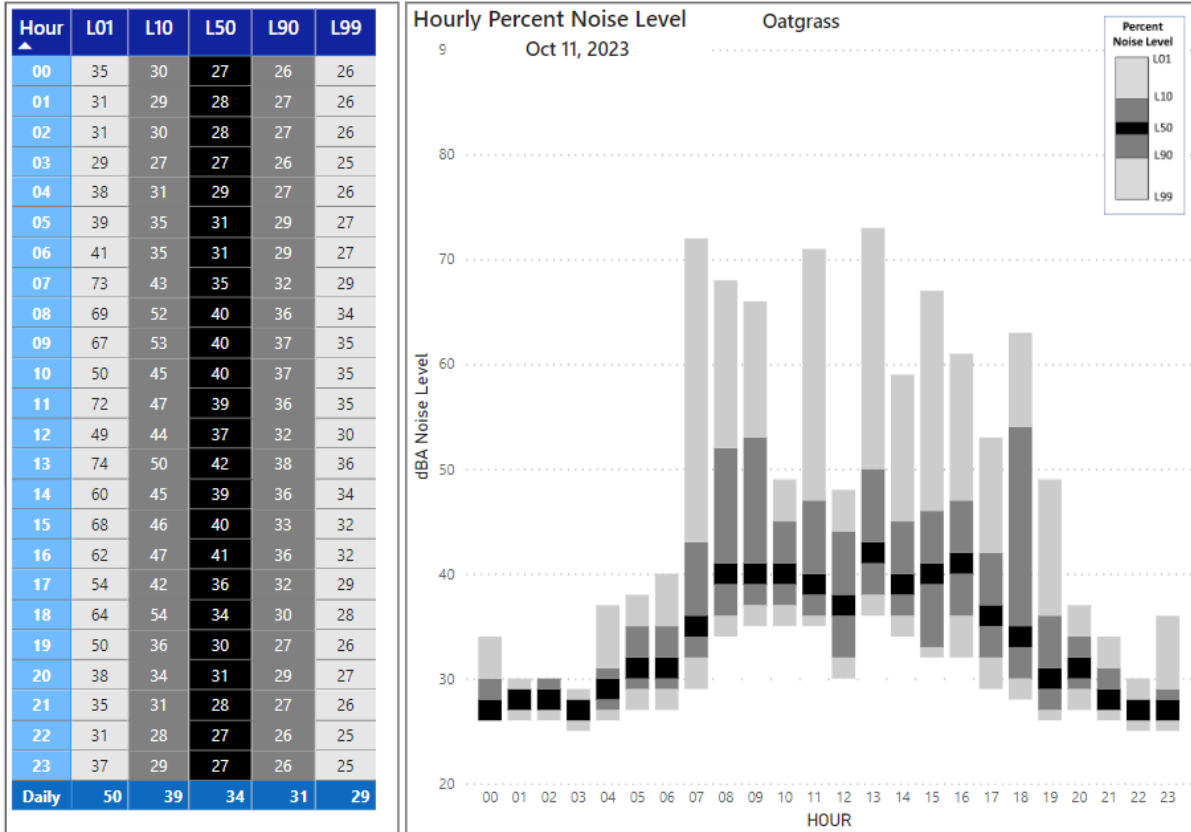

Source: Jackson Hole Airport Noise Monitoring System, 2023



#### 4.4 Aircraft Single-Event Noise Measurement Results



Aircraft single-event noise levels were identified at each measurement site. The acoustic data included the maximum noise level (L<sub>max</sub>), as well as other noise metrics used in noise model validation. The single events measured during the survey were correlated with flight operation information. With this correlated single-event noise data, it was possible to separately identify the single-event noise levels from the different sources of aircraft noise.

The single-event data were analyzed to determine the distribution of events. An example of the range in noise data is presented for the Moose and 4 Lazy F sites in **Figure 4-3** and **Figure 4-4**, respectively. These figures present the average L<sub>max</sub> noise level by category of jet and a histogram of L<sub>max</sub> values for all measured aircraft events colored by aircraft category. These noise events are all jet arrivals to the south on Runway 19. The Moose site is representative of a location closest to the Airport to the north, and the 4 Lazy F Ranch site is representative of farther to the north of the Airport. These results show the wide range in noise level generated by aircraft events that occur at each site and the difference in noise by category of aircraft, which are all jet arrivals to the south on Runway 19.

**Figures 4-5** through **Figure 4-7** present the same results for the Moulton Loop, Golf Course, and Oatgrass sites to the south, which are primarily exposed to departure noise on Runway 19. This data also shows the ranges in single-event noise levels organized by total category of jet aircraft.

Additionally, single-event data was also analyzed by noise level per aircraft type shown on the bottom of **Figures 4-3** through **4-7**. The lower left bar graph illustrates the average L<sub>max</sub> noise level measured by each commercial/regional jet aircraft type. The lower right shows the top 1-average L<sub>max</sub> for General aviation Jets for those aircraft with the loudest events, which were generally produced by older-generation aircraft. The data shows that the commercial/regional jet aircraft generate noise events about 3 to 5 dBA higher than the General Aviation jets on average.

**Figure 4-3**  
 Noise Event Summary, Moose  
 Operation: Runway 19 Arrivals

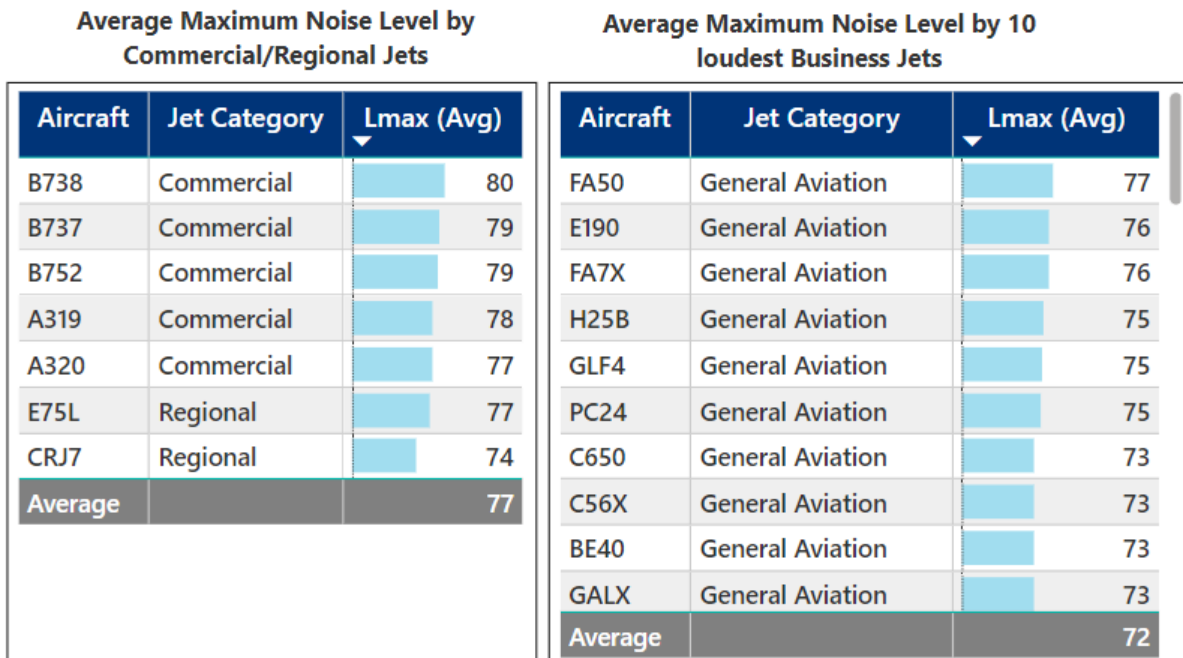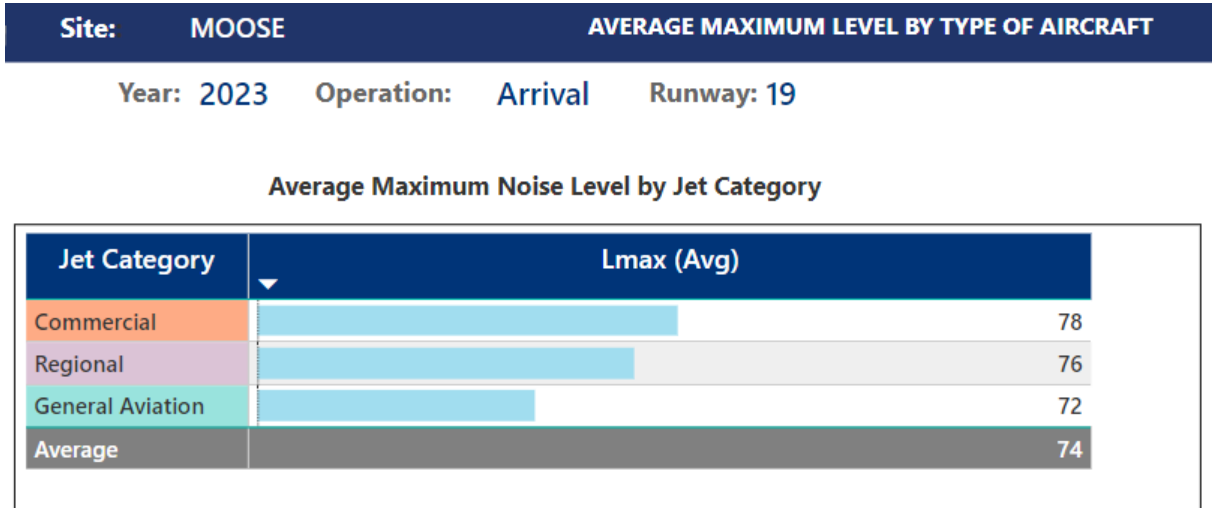

Source: Jackson Hole Airport Noise Monitoring System, 2023

**Figure 4-4**

Noise Event Summary, 4 Lazy F Ranch  
 Operation: Runway 19 Arrivals

**Site: 4LAZYF AVERAGE MAXIMUM LEVEL BY TYPE OF AIRCRAFT**

Year: 2023 Operation: Arrival Runway: 19

Average Maximum Noise Level by Jet Category

| Jet Category     | Lmax (Avg) |
|------------------|------------|
| Commercial       | 72         |
| Regional         | 71         |
| General Aviation | 66         |
| Average          | 69         |

Average Maximum Noise Level by Commercial/Regional Jets


| Aircraft       | Jet Category | Lmax (Avg) |
|----------------|--------------|------------|
| B737           | Commercial   | 74         |
| B738           | Commercial   | 73         |
| B752           | Commercial   | 73         |
| A320           | Commercial   | 72         |
| A319           | Commercial   | 72         |
| E75L           | Regional     | 71         |
| CRJ7           | Regional     | 69         |
| <b>Average</b> |              | <b>72</b>  |

Average Maximum Noise Level by 10 loudest Business Jets

| Aircraft       | Jet Category     | Lmax (Avg) |
|----------------|------------------|------------|
| E190           | General Aviation | 71         |
| FA7X           | General Aviation | 71         |
| GLF4           | General Aviation | 70         |
| FA50           | General Aviation | 70         |
| GL7T           | General Aviation | 69         |
| H25C           | General Aviation | 69         |
| H25B           | General Aviation | 68         |
| GLEX           | General Aviation | 68         |
| E35L           | General Aviation | 68         |
| C650           | General Aviation | 68         |
| <b>Average</b> |                  | <b>66</b>  |

Source: Jackson Hole Airport Noise Monitoring System, 2023

**Figure 4-5**  
 Noise Event Summary, **Moulton Loop**  
 Operation: Runway 19 Departures

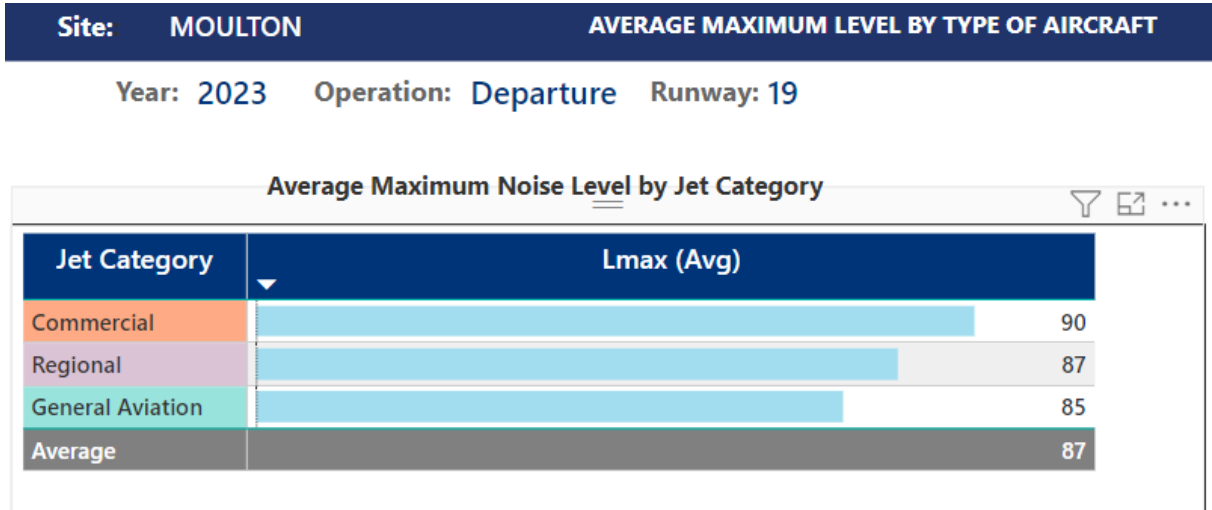

**Average Maximum Noise Level by Commercial/Regional Jets**

| Aircraft       | Jet Category | Lmax (Avg) |
|----------------|--------------|------------|
| B752           | Commercial   | 93         |
| B738           | Commercial   | 93         |
| B737           | Commercial   | 92         |
| A320           | Commercial   | 90         |
| A319           | Commercial   | 90         |
| E75L           | Regional     | 87         |
| CRJ7           | Regional     | 87         |
| <b>Average</b> |              | <b>90</b>  |

**Average Maximum Noise Level by 10 loudest Business Jets**

| Aircraft       | Jet Category     | Lmax (Avg) |
|----------------|------------------|------------|
| FA50           | General Aviation | 94         |
| C650           | General Aviation | 94         |
| F900           | General Aviation | 91         |
| G150           | General Aviation | 91         |
| H25B           | General Aviation | 91         |
| BE40           | General Aviation | 91         |
| GL7T           | General Aviation | 89         |
| FA7X           | General Aviation | 88         |
| GLF4           | General Aviation | 88         |
| E35L           | General Aviation | 88         |
| <b>Average</b> |                  | <b>85</b>  |

Source: Jackson Hole Airport Noise Monitoring System, 2023

**Figure 4-6**  
 Noise Event Summary, **Golf Course**  
 Operation: Runway 19 Departures

**Site: GOLF AVERAGE MAXIMUM LEVEL BY TYPE OF AIRCRAFT**

Year: 2023 Operation: Departure Runway: 19

**Average Maximum Noise Level by Jet Category**

| Jet Category     | Lmax (Avg) |
|------------------|------------|
| Regional         | 70         |
| Commercial       | 70         |
| General Aviation | 66         |
| Average          | 68         |

**Average Maximum Noise Level by Commercial/Regional Jets**

| Aircraft | Jet Category | Lmax (Avg) |
|----------|--------------|------------|
| B738     | Commercial   | 73         |
| B737     | Commercial   | 72         |
| E75L     | Regional     | 70         |
| CRJ7     | Regional     | 70         |
| A319     | Commercial   | 70         |
| B752     | Commercial   | 70         |
| A320     | Commercial   | 69         |
| Average  |              | 70         |

**Average Maximum Noise Level by 10 loudest Business Jets**

| Aircraft | Jet Category     | Lmax (Avg) |
|----------|------------------|------------|
| G150     | General Aviation | 74         |
| FA50     | General Aviation | 73         |
| C650     | General Aviation | 73         |
| BE40     | General Aviation | 71         |
| H25B     | General Aviation | 69         |
| FA7X     | General Aviation | 69         |
| F900     | General Aviation | 68         |
| GALX     | General Aviation | 68         |
| LJ75     | General Aviation | 68         |
| CL30     | General Aviation | 68         |
| Average  |                  | 66         |

Source: Jackson Hole Airport Noise Monitoring System, 2023

**Figure 4-7**  
 Noise Event Summary and Histogram Report, Oatgrass  
*Operation: Runway 19 Departures*

**Site: Oatgrass** **AVERAGE MAXIMUM LEVEL BY TYPE OF AIRCRAFT**

Year: 2023 Operation: Departure Runway: 19

**Average Maximum Noise Level by Jet Category**

| Jet Category     | Lmax (Avg) |
|------------------|------------|
| Commercial       | 78         |
| Regional         | 78         |
| General Aviation | 74         |
| Average          | 76         |

**Average Maximum Noise Level by Commercial/Regional Jets**

| Aircraft | Jet Category | Lmax (Avg) |
|----------|--------------|------------|
| B737     | Commercial   | 80         |
| B752     | Commercial   | 79         |
| E75L     | Regional     | 78         |
| A319     | Commercial   | 78         |
| CRJ7     | Regional     | 78         |
| A320     | Commercial   | 77         |
| Average  |              | 78         |

**Average Maximum Noise Level by 10 loudest Business Jets**

| Aircraft | Jet Category     | Lmax (Avg) |
|----------|------------------|------------|
| G150     | General Aviation | 82         |
| BE40     | General Aviation | 81         |
| FA7X     | General Aviation | 80         |
| H25B     | General Aviation | 79         |
| F900     | General Aviation | 78         |
| GLEX     | General Aviation | 77         |
| C560     | General Aviation | 77         |
| GL5T     | General Aviation | 77         |
| GALX     | General Aviation | 77         |
| PC24     | General Aviation | 76         |
| Average  |                  | 74         |

Source: Jackson Hole Airport Noise Monitoring System, 2023

#### 4.5 DNL Noise Measurement Results

Aircraft-related DNL levels were calculated for each of the seven long-term noise monitoring locations including the new site in Bar B Bar Ranch called Oatgrass using AEDT and validated with the measured data. **Table 4-2** presents the results of the DNL noise measurements at the seven noise monitoring locations. This table lists the average aircraft related DNL for annual noise levels for 2023.

**Table 4-2**  
Annual Aircraft DNL Results (2023)

| Site # | Name            | Description                        | Aircraft Annual DNL |
|--------|-----------------|------------------------------------|---------------------|
| 1      | Moulton Loop    | Zenith Drive and Spring Gulch Road | 62                  |
| 2      | Golf Course     | Jackson Hole Golf & Tennis Club    | 49                  |
| 3      | Barker Ranch    | Circle H Ranch (Barker Residence)  | 33                  |
| 4      | Moose           | Moose Entrance                     | 52                  |
| 5      | 4 Lazy F Ranch  | 4 Lazy F Ranch                     | 48                  |
| 6      | Timbered Island | East of Timber Island              | 32                  |
| 7      | Oatgrass        | Bar B Bar Ranch                    | 55                  |

Source: Jackson Hole Airport Noise Monitoring System, 2023

## 5.0 Annual Noise Contours

---

### 5.1 Introduction

Contour modeling is a key element of the report. Generating accurate noise contours is largely dependent on the use of a reliable, validated, and updated noise model. The FAA's Aviation Environmental Design Tool (AEDT) was used to model the flight operations at Jackson Hole Airport and is the accepted industry standard software to model aircraft noise at airports in the United States as well as for international environmental analysis. The AEDT has an extensive database of civilian aircraft noise characteristics.

Airport noise contours were generated using AEDT Version 3f. Version 3f, the latest version, was released for use in December 2023, and is state-of-the-art airport noise modeling. AEDT is a computer program developed to plot noise contours for airports. The program includes standard aircraft noise and performance data for more than 200 aircraft types and can be tailored to the characteristics of the airport in question.

One of the most important factors in generating accurate noise contours is the collection of accurate operational data. AEDT requires the input of the physical and operational characteristics of the airport. Physical characteristics include runway coordinates, airport altitude, temperature, and topographical data, optionally. Operational characteristics include various types of aircraft data. This includes not only the aircraft types and flight tracks but also departure procedures, arrival procedures, and stage lengths specific to the operations at the airport. While AEDT contains a wealth of information, there were minor adjustments made to these inputs to better reflect local conditions as captured and validated by the noise monitors in the Park and south of the Airport. Aircraft data needed to generate noise contours include:

- Number of aircraft operations by type
- Types of aircraft
- Daytime/nighttime distribution by type
- Flight tracks
- Flight track utilization by type
- Flight profiles
- Typical operational procedures
- Average meteorological conditions

### 5.2 Existing Aircraft Operations

The existing noise environment for the Airport was analyzed based upon the 2023 annual operations. The data was derived from various sources, which include aircraft tower counts and noise monitoring system operational data. A variety of operational data is necessary to determine the noise environment around the airport. This data includes the following summary information and is discussed in detail in the following paragraphs:



- Aircraft activity levels
- Fleet mix
- Time of day
- Runway use
- Flight path utilization

The tower count data showed that for 2023, there was a total of 31,329 annual operations. The breakdown by aircraft category was determined from a variety of sources that include:

- Airport radar
- FAA Operations Network (OPSNET) and TFMSC

The 2023 aircraft operations for each category of operation are summarized in **Table 5-1**. These operations are categorized as commercial jets, regional jets, small commuters, general aviation, business jets, turbo- and piston-propeller, helicopter, and military. The total number of annual corporate jet aircraft was determined from the Airport's radar data, which provides information on aircraft that file IFR flight plans, accounting for nearly all larger aircraft including business jets. Larger twin-engine propeller aircraft are also counted in airport radar, but smaller aircraft flying VFR are not always included. The AEDT model was based upon a compilation of all 31,329 operations at the Airport.

**Table 5-1**  
Summary of Operations - 2023

| Category Type           | Annual Operations | Daily Operations | Percent Nighttime |
|-------------------------|-------------------|------------------|-------------------|
| Commercial Jet          | 8,327             | 22.8             | 1.25%             |
| Regional Jet            | 3,519             | 9.6              | 0.10%             |
| Small Commuter          | 0                 | 0.0              | 0.00%             |
| General Aviation        |                   |                  |                   |
| Business Jet            | 16,545            | 45.3             | 0.78%             |
| Turbo-/Piston-Propeller | 2,213             | 6.1              | 3.30%             |
| Helicopter              | 524               | 1.4              | 0.10%             |
| Military                | 201               | 0.6              | 0.00%             |
| <b>Total Operations</b> | <b>31,329</b>     | <b>85.8</b>      | <b>1.10%</b>      |

Source: FAA OPSNET, FAA TFMS data, and Jackson Hole Airport Noise Monitoring System

Fleet Mix: The fleet mix of aircraft that operate at the airport is one of the most important factors of the aircraft noise environment. The business jet fleet mix data was determined from a review of the airport radar database.


Time of Day: In the DNL metric, any operations that occur after 10 p.m. and before 7 a.m. are considered more intrusive and are weighted by 10 dBA. Therefore, the number of nighttime operations is critical in determining the DNL noise environment and is also important to the residences around the Airport. The nighttime operational assumption data is summarized in **Table 5-1**.

Runway Use: An additional important consideration in developing the noise contours is the percentage of time each runway is utilized. The speed and wind direction dictate the runway direction utilized by an aircraft. From a safety standpoint, it is safest for an aircraft to arrive and depart into the wind; when wind direction changes, operations are shifted to the runway that favors the new wind direction. For the Airport, wind is generally calm with the predominate wind direction from the south. Runway 19 is used more than the reverse runway direction, Runway 01. As described in Section 2.3.1, the Access Plan contains a Noise Abatement Plan that includes preferential runway use, which can be used when weather and operational conditions allow.

Flight Path Utilization: These paths are not precisely defined ground tracks, but represent a broad area over which the aircraft will generally fly. The modeling analysis includes a total of eight departure flight tracks and six arrival flight tracks to model the aircraft flight paths at the Airport.


A sample of the 2023 flight tracks used in AEDT modeling are presented in **Figure 5-1** and **5-2**. **Figure 5-1** presents departure and arrival flight paths for jets in south flow on Runway 19. **Figure 5-2** presents departure and arrival flight paths for jets in north flow on Runway 01. The flight track data was used to help define the location of the aircraft flight paths and in the correlation of the noise measurement data with the aircraft operational data.

**Figure 5-1**  
Jet Arrival and Departure Flight Tracks  
*Operation: Runway 19 South Flow*

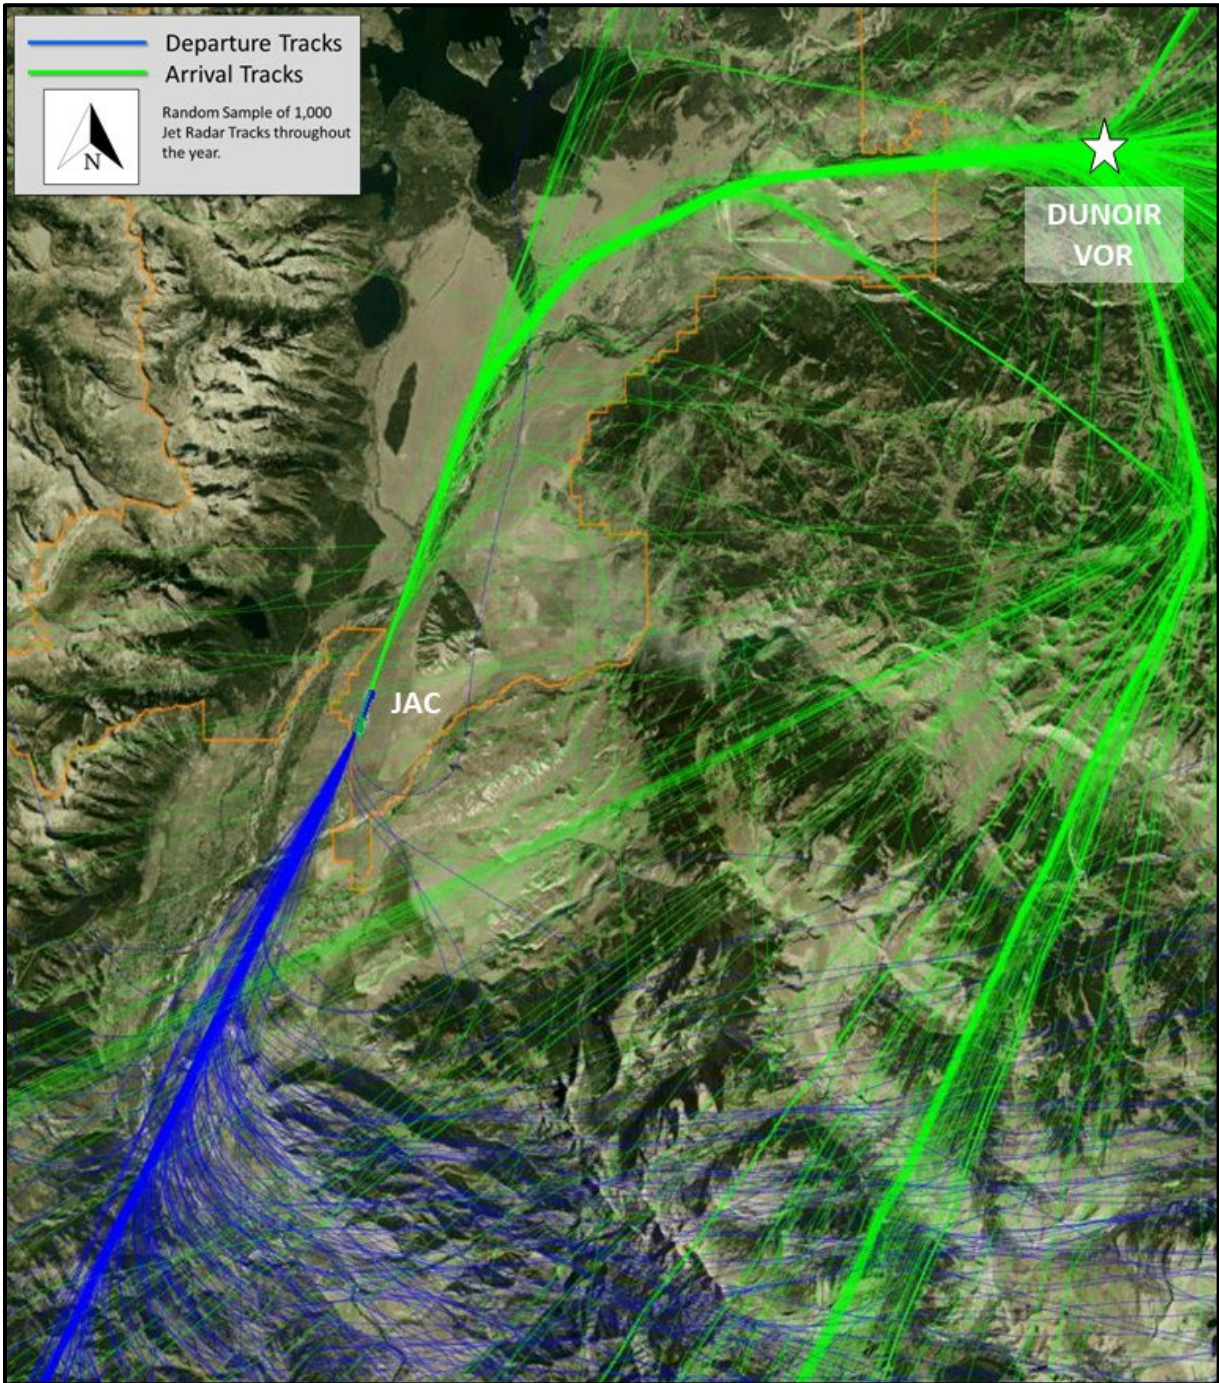

Source: Jackson Hole Airport Noise Monitoring System, 2023

**Figure 5-2**  
Jet Arrival and Departure Flight Tracks  
*Operation: Runway 01 North Flow*

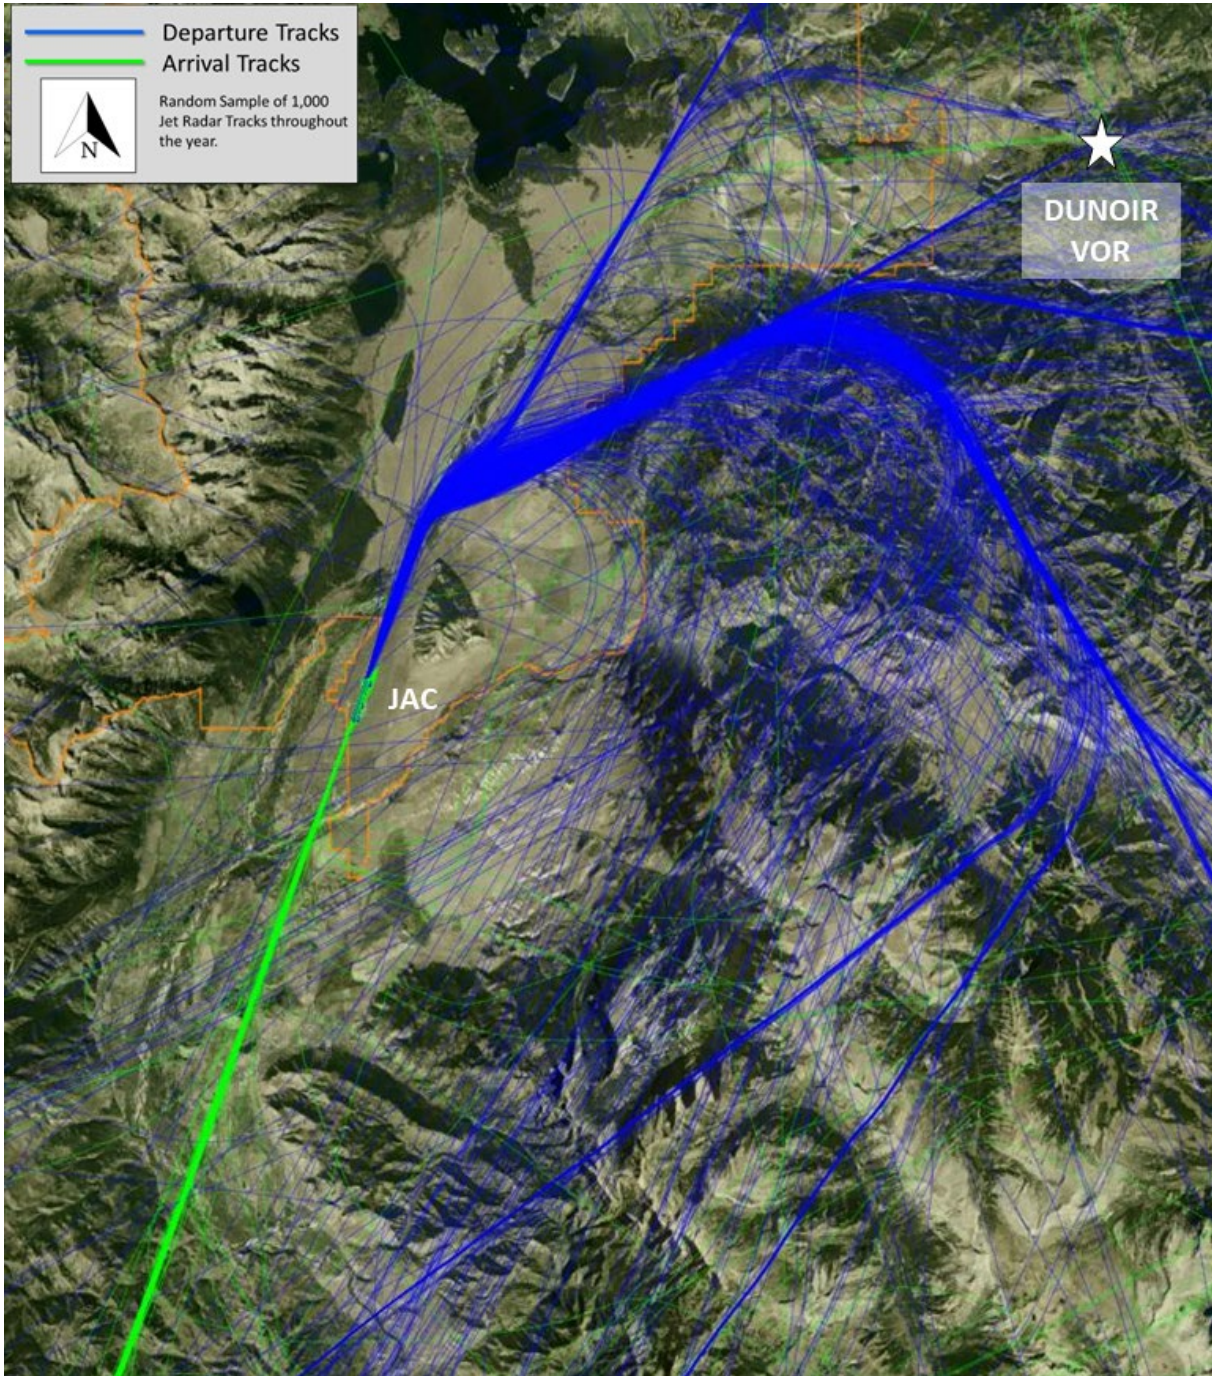


Source: Jackson Hole Airport Noise Monitoring System, 2023

### *5.3 Noise Modeling Results*

The noise metric used to assess the 2023 annual noise contour is the Day Night Average Sound Level (DNL). This model uses FAA standard modeling assumptions that would be required within an FAA-sponsored environmental study. The DNL is a 24-hour time-weighted energy average noise level based on the A-weighted decibel. It is a measure of the overall noise experienced during an entire year of flight operations. The 2023 AEDT contours are presented in **Figure 5-3**.

**Figure 5-3**  
2023 Annual DNL Noise Contour

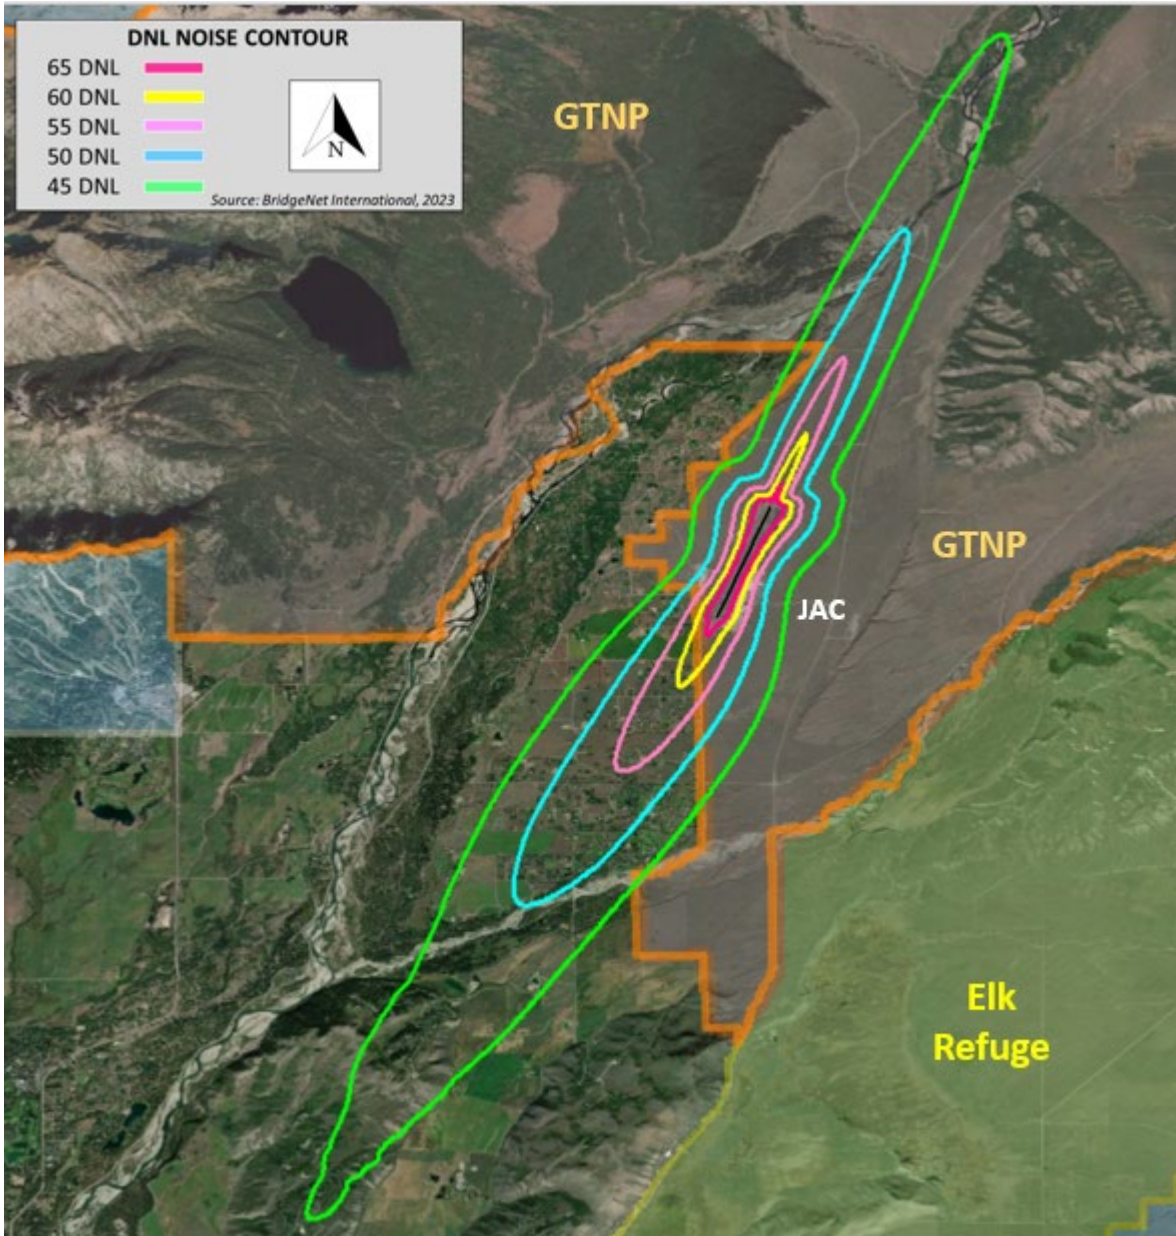

Source: BridgeNet International, 2023

## 6.0 Summary

---

### 6.1 Overall Summary

The results of the noise measurements and modeling report show that the Airport is in compliance with the requirements of the Airport Use Agreement as reflected in Table 4-2. The measured/modeled noise levels are compliant with the Agreement. The Agreement includes the annual DNL noise level contour from aircraft noise at two noise monitoring sites, Moose and Barker are required to be 55 DNL and 45 DNL, respectively. The DNL contour at both sites is below the level in the Agreement. The 65 DNL noise contour does not extend beyond the Airport boundary. There are *no* residential land uses exposed to measured/modeled noise levels more than 65 DNL.

The annual 2023 DNL noise levels at the Airport have slightly increased from the 2022 levels primarily from the runway closure period in 2022 which led to a reduction in overall operations. The levels are below the 2021 noise levels. An important factor for the trend in reduction in noise that has occurred at the airport since 1984 is the increased utilization of new-generation aircraft, including Stage 4 and Stage 5 aircraft, which are substantially quieter than aircraft operated here in the past. This trend continued in 2023.